


Fernbedienung, 4-fach, batterieelos für CASAMBI-Netzwerke  
 Remote control, 4-way, battery free for CASAMBI networks

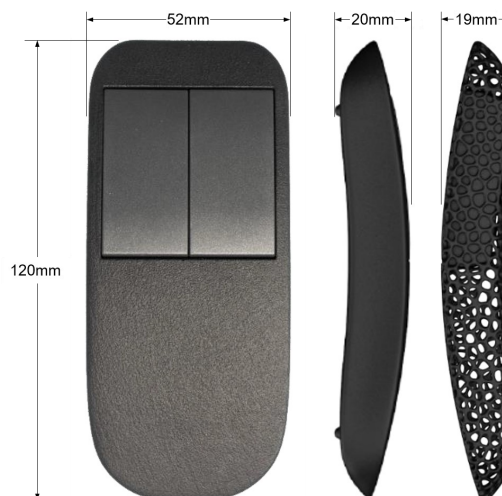

**NEW!**

CASAMBI  
READY

CE

Technische Daten <i>Technical data</i>	Struktur <i>Textured</i>	Glatt <i>Plain</i>
Artikelnummer <i>Part no.</i>	<b>808897</b>	<b>808898</b>
Typ <i>Type</i>	RC4EMEBTB	RC4EPLBTB
Funkfrequenz <i>Radio frequency</i>	2,4..2,483 GHz; 0,4 dBm	
Reichweite <i>Range</i>	bis zu 10 m in einem Raum <i>up to 10 m in the same room</i>	
Geschätzte Lebensdauer <i>Estimated lifetime</i>	50.000 Schaltvorgänge <i>actuations</i>	
Umgebungstemperatur (ta) <i>Ambient temperature (ta)</i>	-20..+65 °C	
Abmessungen <i>Dimensions</i>	120 x 52 x 19 mm	120 x 52 x 20 mm

- Fernbedienung zur Steuerung von Geräten in CASAMBI-Netzwerken
- Bis zu 4 programmierbare Tasten (dimmen, Szenen, Farbe, ...)
- Erstprogrammierung muss per Smartphone / Tablet (Apple / Android) mit NFC-Schnittstelle und der CASAMBI-App erfolgen!
- Die Energie für das Funksignal entsteht beim Drücken der Taste durch die kinetische Energie (Energy Harvesting); es wird daher keine Batterie benötigt, wartungsfrei

- Remote control for controlling devices inside CASAMBI networks
- Up to 4 programmable buttons (dimming, scenes, colour, ...)
- Initial programming must be done by smartphone / tablet (Apple / Android) with an NFC interface and the CASAMBI app!
- The energy for the radio signal arises when pressing the button, by an electrodynamic energy generator; therefore no battery is needed, maintenance free

